

WGT-YB ASSEMBLY

Part #: WGT-YB 68" Glass Track for Wood- Yard bronze

Package includes one top and bottom track with gaskets and 10 fasteners (#10 x 1.5" Pan Head wood screws)

Passes NBC/IBC in-fill load testing when used with Regal ¼" (6mm) Tempered Glass panels. NOTE: Installer is responsible to ensure the integrity of the substrate material and construction design, to adhere to applicable building codes.

Designed for sections up to 68" and can be cut to size for smaller sections.

Can attach between, or to the face of wood rails.

Regal LED strip lighting compatible.

The following assembly instructions are based on Regal Ideas 6mm Tempered glass panels (35.875" high glass). Wood railing must be constructed to allow glass tracks to be installed 37.75" apart, measured from the top edge of the upper track to the bottom edge of the lower track (see diagram).


NOTE: Larger track is for the top rail.

Option A: Install Tracks between wood rails

Remove gaskets from the top and bottom tracks.

Using the pre-drilled 9/16" holes in the inner wall for placement, drill 3/16" holes through top and bottom tracks 16" apart where screws are to be located. Position the tracks and pre-drill the wood rails with 1/8" bit. Secure tracks to wood rails with screws. Replace gaskets back in tracks.

Install glass by first pushing the glass fully up into the top track and then seating glass down into the bottom track.

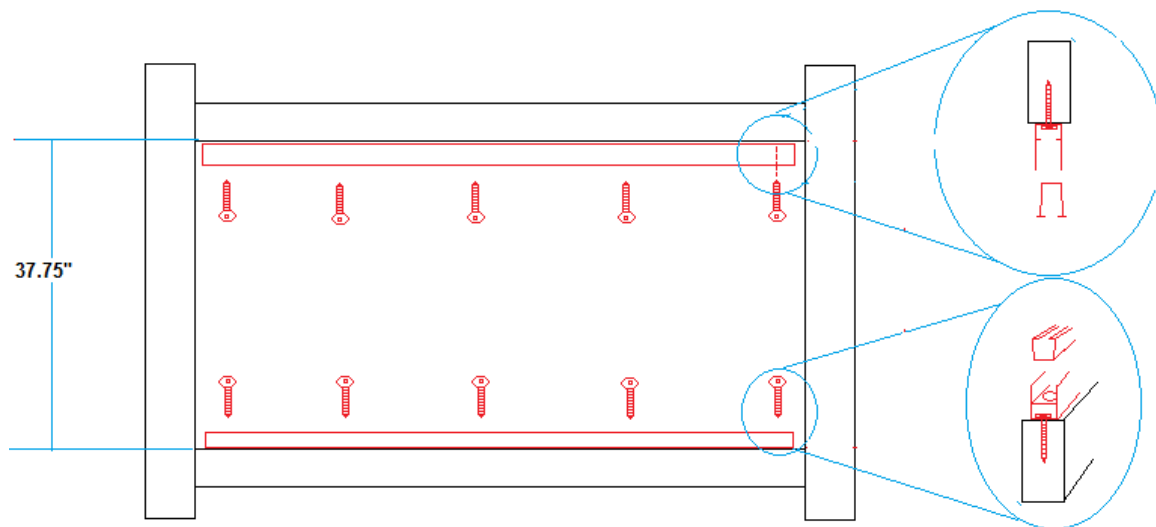

Option B: Install Tracks between wood rails

Pre-drill 3/16" holes for screws 16" apart in top and bottom glass tracks. Position the tracks and pre-drill the wood rails with 1/8" bit. Secure tracks to wood rails with screws.

Install glass by first pushing the glass fully up into the top track and then seating glass down into the bottom track.

